




Flood Plain Floor Solution

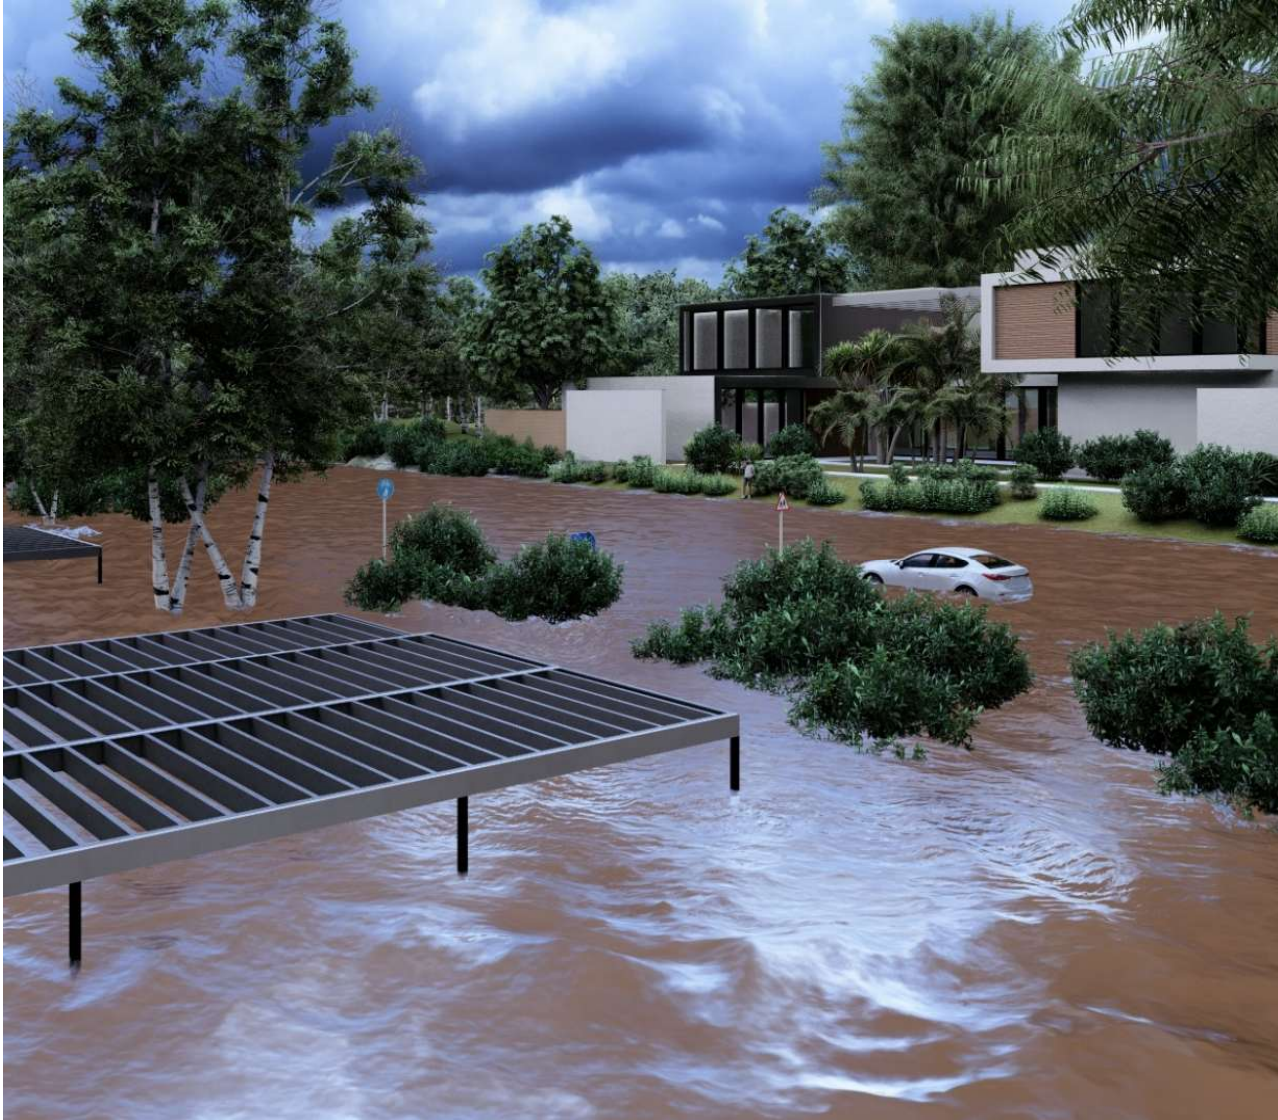

CORROSIVITY CATEGORY:	CAT. 1	CAT. 2	CAT. 3		CAT. 4	
Distance to sea/Canal:	N/A	50+ Km	Coastal Surf 1Km+	Sheltered 100m+	Coastal Surf 200m+	Sheltered 50m+

Min. Coating Category Requirement

Mid-floors (unvented/closed)	C	C	C	C	C	C
Sub-floors (vented/open)	N/A	C	C	D	D	D
Deck (stand-alone)	N/A	C	C	D	D	D
Deck (connected to house)	N/A	C	C	C	C	C

Coating Specifications:

C	Z275-Z350
D	Z450 Min.

Code Designation: AS4312 + ISO9223

Notes:
 Refer to NASH Handbook 2015 (Cl.6.3 [Screws], 6.6.2b [Nails]) for industry compliance
 To confirm vent locations, below UltraSpan floor and nto in prevailing sea direction [NCC/BCA]
 Wash down prior to enclosure when exposed for longer periods
 Inspect regularly all open decks